

FIG. 1



FIG. 2

1

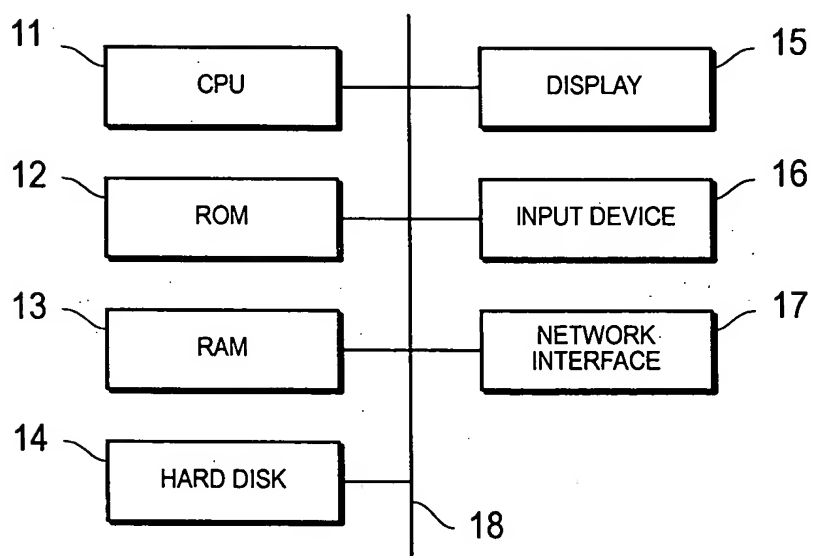


FIG. 3

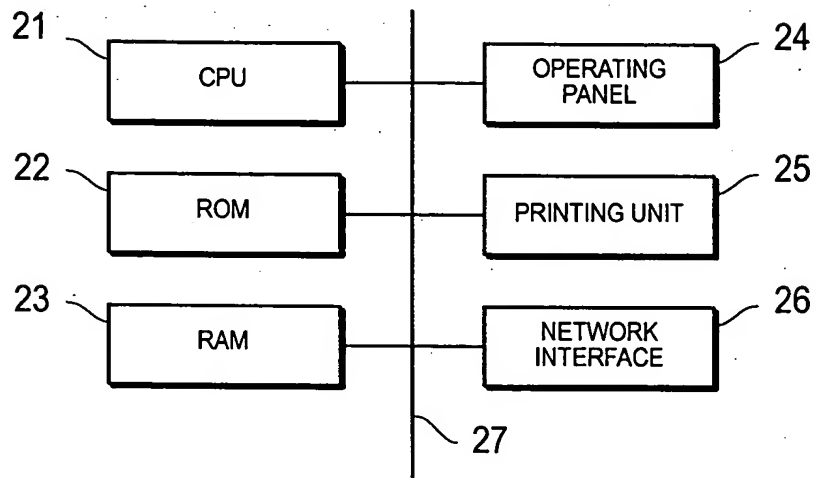


FIG. 4

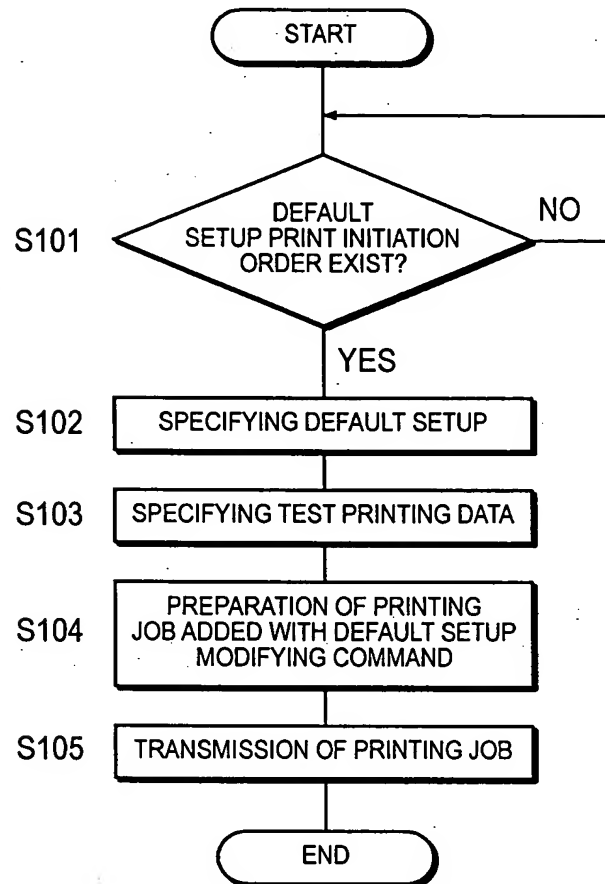


FIG. 5

4

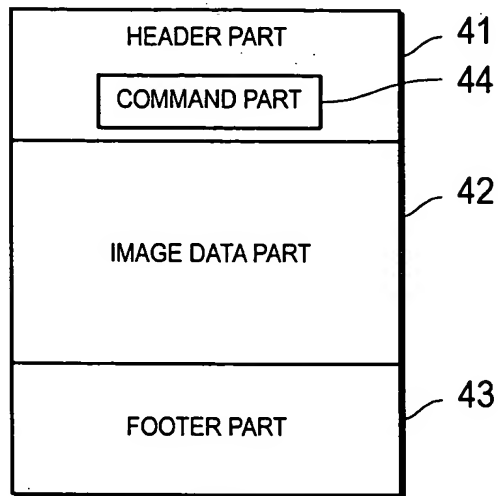


FIG. 6

44

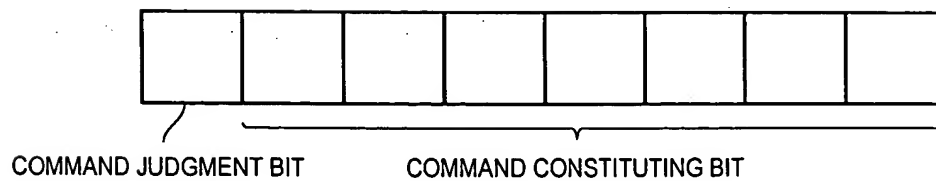


FIG. 7

5

DEFAULT SETUP COMMAND (COMMAND CONSTITUTING BIT)	COMMAND 1 (0000001)	COMMAND 2 (0000010)	COMMAND 3 (0000011)	.....
OEM NAME	COMPANY A	COMPANY B	COMPANY C	.....
DEFAULT LANGUAGE	ENGLISH	JAPANESE	ENGLISH	.....
NETWORK SETUP	IP ADDRESS: aaa.aaa.aaa.aaa SUBNET MASK: 255.255.255.0 GATEWAY: aaa.aaa.aaa.001 DHCP:OFF HTTP:OFF	IP ADDRESS: bbb.bbb.bbb.bbb SUBNET MASK: 255.255.255.0 GATEWAY: bbb.bbb.bbb.001 DHCP:OFF HTTP:ON	NO	.....
DEFAULT PAPER	LETTER	A4	LETTER	.....
DEFAULT POWER SAVING MODE TIME SETUP	30 MINUTES	30 MINUTES	60 MINUTES	.....
ID	1111	2222	3333	.....
.....	.....	.....	.....	.....

FIG. 8

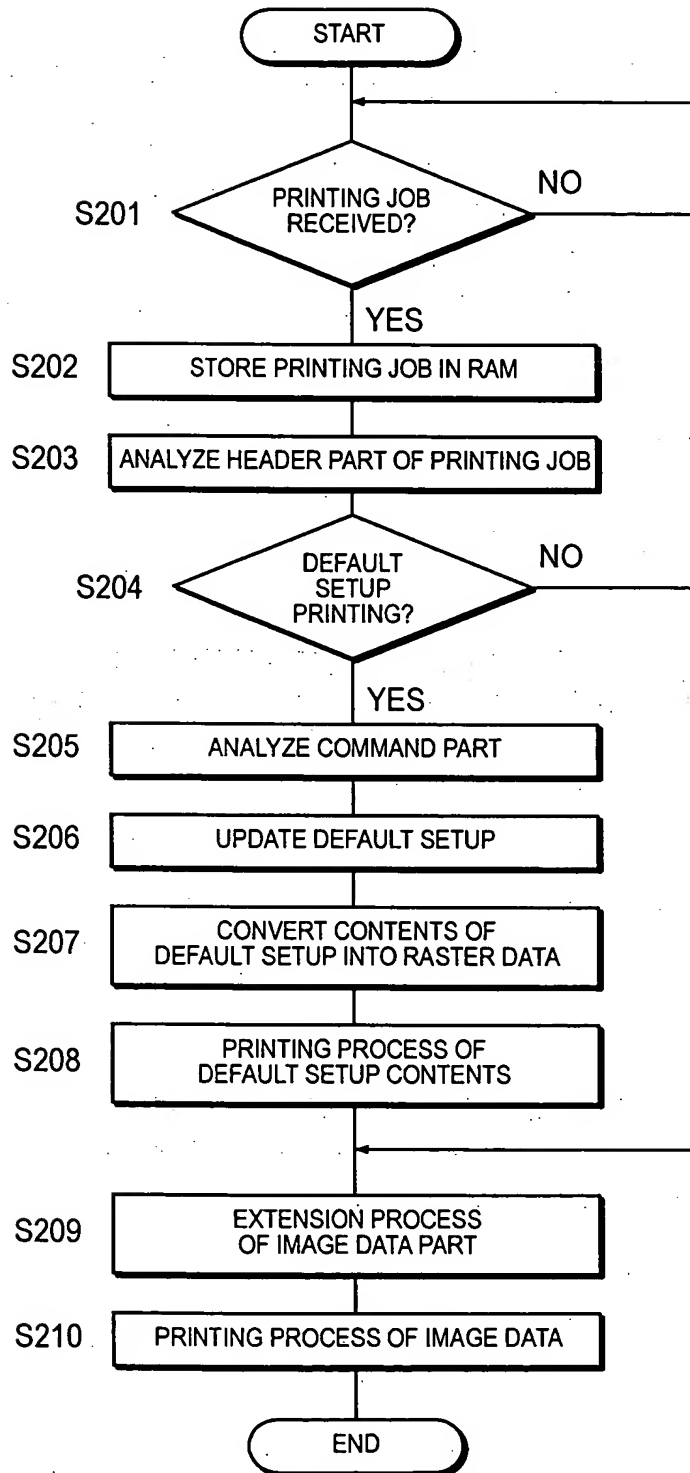



FIG. 9

6



COMPANY xxx

- LANGUAGE SETUP  
JAPANESE
- NETWORK SETUP  
IP ADDRESS: xxx.xxx.xxx.xxx  
SUBNET MASK: xxx.xxx.xxx.xxx  
GATEWAY: xxx.xxx.xxx.xxx  
DHCP:ON  
HTTP:ON
- DEFAULT PAPER SETUP  
A4
- POWER SAVING MODE  
30 MINUTES
- ID  
xxxx